

Nozzle Type Vacuum Sealer

EXV series vertical type vacuum sealer is ideal for bag in a box type packing, granule, large volume products where a conveyor or supporting platform is applied. Its opened head design gives easy access to bag positioning. Its control system is powered by PLC controller and Touch Screen Panel (HMI) for precise settings and user-friendly operations.

Standard Features:

- High flow stainless steel retractable twin nozzles
- Clean, quiet, non-particle generating, 100% maintenance free air-driven vacuum ejector
- Easy set-up using only compressed air and a standard electrical outlet
- PLC controller
- Vacuum gauge
- Touch Panel Interface (HMI)
- Twin Nozzles with Changeable Pitch 2 Pitch Distance
- Foot pedal switch activated
- Descending head prevents heavy bags from being lifted off conveyor during vacuum cycle
- Built-in emergency stop push button
- Object / Finger anti-pinch safety system
- Bi-Active Impulse Sealing (Top & Bottom Heating)

Applications:


- Bag in a box packaging
- Moisture resistance sealing
- Extend storage period for packed goods
- Pouch Materials = Aluminum Foil, OPP Films, Nylon, HDPE, LDPE, Laminated Films

Model Selection:

- EXV-SXX = Fully Stainless Steel Fabrication
- EXV-XXG = With Gas Purging Function

Optional Upgrade:

- Motorized belt conveyor
- Bag stretcher
- BUSCH Dry Vacuum Pump
- BUSCH Oil Lubricated Vacuum Pump
- Other Sealing Length available 10mm sealing width
- Other voltage available (AC 220V)

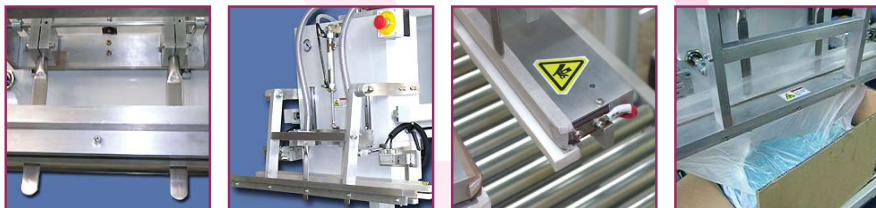

For more information, please contact local distributor :

Model:	EXV-25	EXV-30	EXV-35
Seal Size:	(L) 25" x (W) 8mm	(L) 30" x (W) 8mm	(L) 35" x (W) 8mm
Machine Dimension:	L50"x W42"xH76"	L55"x W42"xH76"	L60"x W42"xH76"
Power:	1Φ, AC 110V	1Φ, AC 110V	1Φ, AC 110V
Vacuum Flow:	9.40 cfm	9.40 cfm	9.40 cfm
Maximum Vacuum:	-26inHg	-26inHg	-26inHg
Air Requirement:	5CFM @ 87PSI	5CFM @ 87PSI	5CFM @ 87PSI

Note: Machine and specifications are subjected to change due to continuous improvement.